


BLHI30

ondrives

Precision Gears

Spiral Bevel Gearboxes

8mm Single Input Bore • 8mm Output Shaft • T_{2n} 1.76-2.2Nm **1:1 - 2:1**

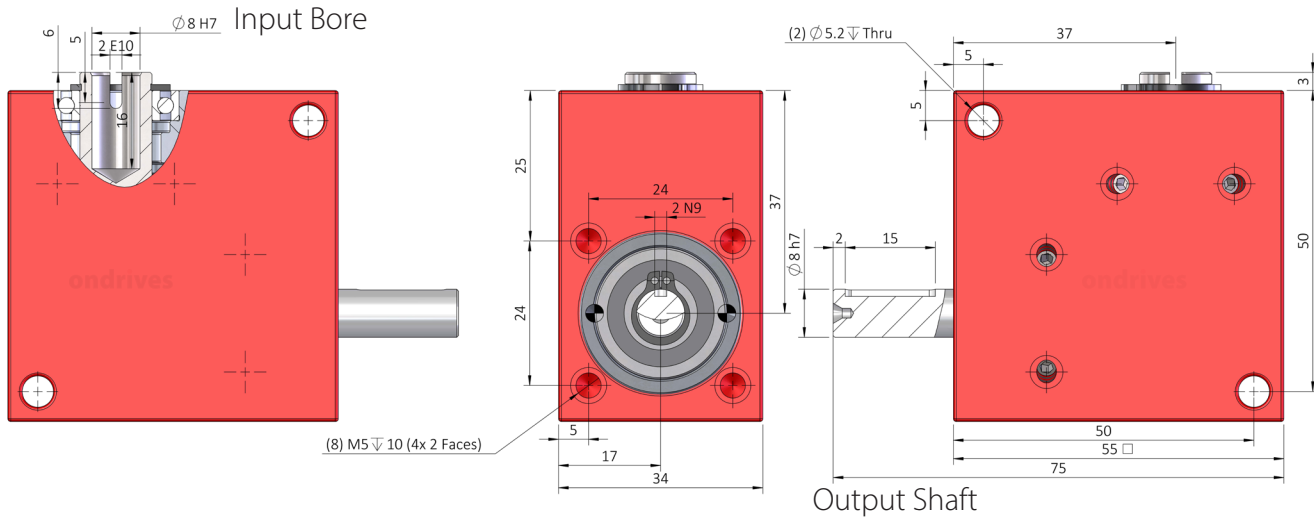

	Part Numbers				
Output Backlash j	Output Backlash j A	Output Backlash j AR	Gear Ratio i	Efficiency η_z	Reflected Inertia at Input
$\leq 0.75^\circ$	$\leq 0.50^\circ$	$\leq 0.166^\circ$		n_{1nom}	$kg \cdot m^2$
BLHI30-1	BLHI30-1A	BLHI30-1AR	1:1	88%	2.19×10^{-6}
BLHI30-2	BLHI30-2A	BLHI30-2AR	2:1	88%	5.00×10^{-7}

BLHI 1:1 Ratio Bore can be used as an input or output.

Weight: 0.30 kg.

Nom. Input Speed [$S5 T_{2n}$ n_{1nom}]: 1,000 min^{-1} (r/min)

Max. Input Speed n_{1max} : 3,000 min^{-1} (r/min)

Lubrication: Grease Shell Gadus S2 V220AD 2

Lubrication Temperature: Max. Operating $\approx 60^\circ C$

Max. Input Radial Load F_{r1} : 30N.

Max. Output Radial Load F_{r2} : 30N.

Max. Input Axial Load F_{a1} : 20N.

Max. Output Axial Load F_{a2} : 20N.

Testing in your application is necessary.

You will need to assess duty cycles and confirm suitability with your own calculations.


Figures listed are for guidance only.

Cooling may be needed dependent on application.

Spiral Bevel Gearboxes

8mm Single Input Bore • 8mm Output Shaft • T_{2n} 1.76-2.2Nm **1:1 - 2:1**

BLH Series Spiral Bevel Gearbox

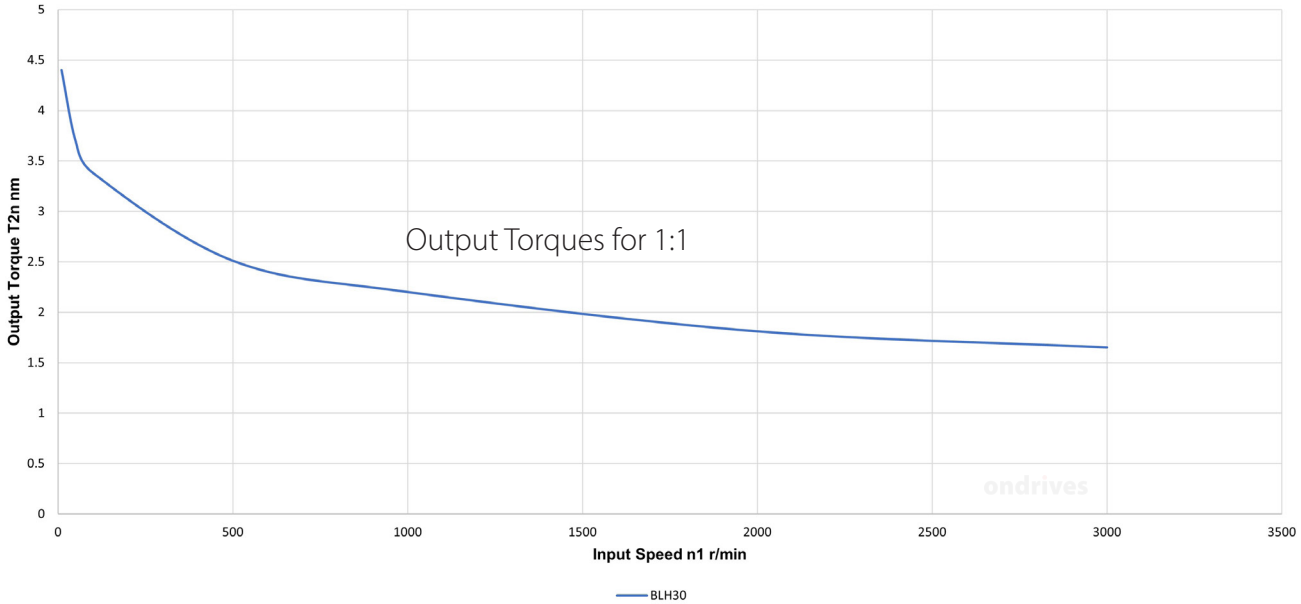

BLH Series Spiral Bevel Gearbox

