

FFS50

# ondrives

Precision Gears

Parallel Offset Gear Reducers



## 117mm Centres Parallel Offset Gear Reducers

16mm Input Bore 30mm Output Bore •  $T_{2n}$  147Nm – 850Nm **2:1 - 7:1**


**Spur - Helical Gears.**

**Standard Versions - Standard Torque**

Steel Gears, will give you good levels of strength and torque in use.

**XH Versions - High Torque**

Hardened Gears, will give you high levels of strength and torque in use.

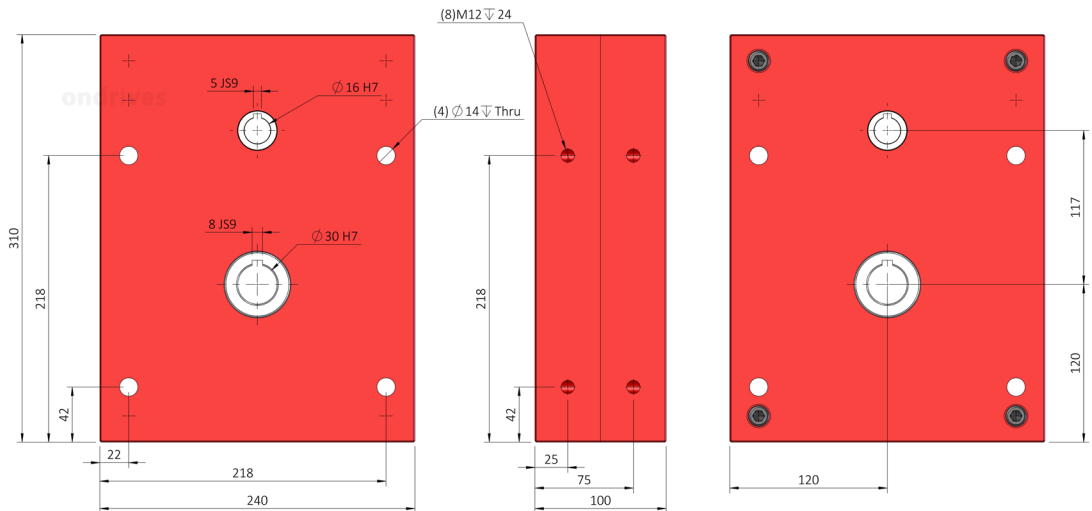

Output Backlash j	Part Numbers	Output Backlash j AR	Gear Ratio i	Efficiency $\eta_z$	Torque Version
$\leq 0.50^\circ$		$\leq 0.16^\circ$		<b>n1nom</b>	
FF50-2-16	FF50-2A-16	FF50-2AR-16	2:1	93%	Std
FF50-3-16	FF50-3A-16	FF50-3AR-16	3:1	93%	Std
FF50-4-16	FF50-4A-16	FF50-4AR-16	4:1	93%	Std
FF50-5-16	FF50-5A-16	FF50-5AR-16	5:1	93%	Std
FF50-6-16	FF50-6A-16	FF50-6AR-16	6:1	93%	Std
FF50-7-16	FF50-7A-16	FF50-7AR-16	7:1	93%	Std
FF50-XH-2-16	FF50-XH-2A-16	FF50-XH-2A-16	2:1	93%	High
FF50-XH-3-16	FF50-XH-3A-16	FF50-XH-3A-16	3:1	93%	High
FF50-XH-4-16	FF50-XH-4A-16	FF50-XH-4A-16	4:1	93%	High
FF50-XH-5-16	FF50-XH-5A-16	FF50-XH-5A-16	5:1	93%	High
FF50-XH-6-16	FF50-XH-6A-16	FF50-XH-6A-16	6:1	93%	High
FF50-XH-7-16	FF50-XH-7A-16	FF50-XH-7A-16	7:1	93%	High

**Weight:** 26.3kg.

**Nom. Input Speed [S5  $T_{2n}$ ] n1nom:** 1,000 min<sup>-1</sup> (r/min)

**Max. Input Speed n1max:** 2,000 min<sup>-1</sup> (r/min)

**Lubrication:** Grease Shell Gadus S5 V42P 2.5

**Lubrication Temperature:** Max. Operating  $\approx 60^\circ\text{C}$

**Max. Input Radial Load  $F_{r1}$ :** 400N.

**Max. Output Radial Load  $F_{r2}$ :** 1000N.

**Max. Output Axial Load  $F_{a2}$ :** 600N.

Testing in your application is necessary.

You will need to assess duty cycles and confirm suitability with your own calculations.

Figures listed are for guidance only.

Cooling may be needed dependent on application.

ondrives

Precision Gears

T: +44 1246 455500

sales@ondrives.com www.ondrives.com

Updated January 2024 subject to change for use as a guide only.

### 117mm Centres Parallel Offset Gear Reducers

16mm Input Bore 30mm Output Bore •  $T_{2n}$  147Nm – 850Nm **2:1 - 7:1**

FF50 FFS50 2:1 - 7:1 Series Parallel Offset Gearboxes

