

Worm Gear Reducers


Flange Input • 10mm Input Bore • 15mm Output Bore
55mm Centre Distance • T_{2max} 38Nm – 60Nm • **10:1 - 120:1**

Worm Gear Rotation Direction.

RH-Right Hand

When input rotation is clockwise, output gear is pulled towards input.

When input is counter-clockwise, output gear is pushed away from input.

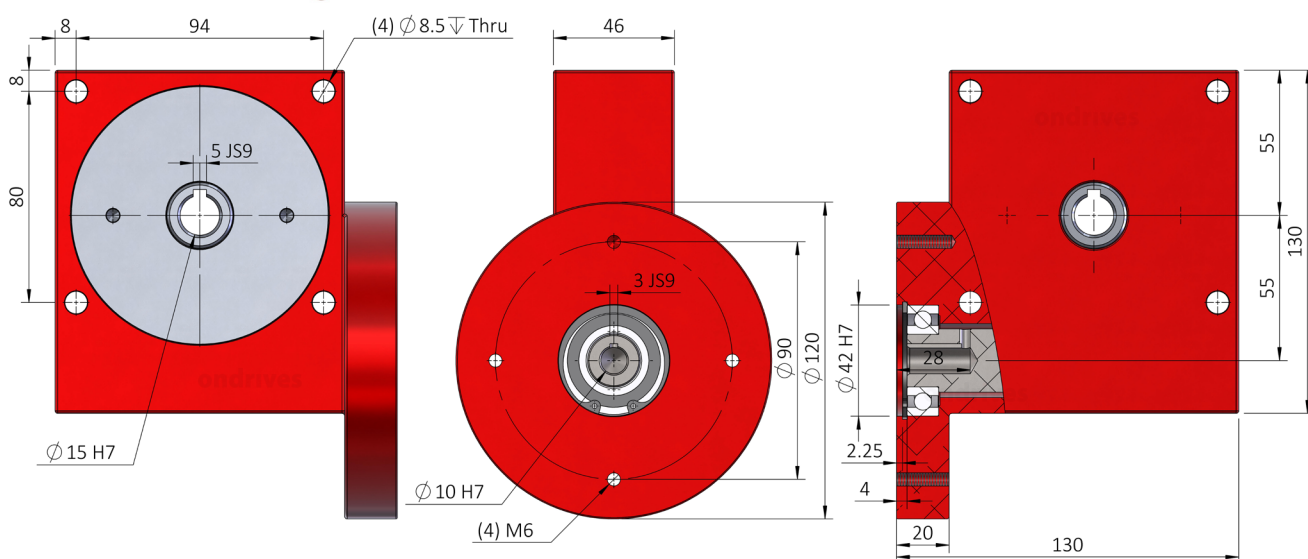

Output Backlash j	Output Backlash j A	Output Backlash j AR	Gear Ratio i	Efficiency ηz	Lead Direction	Reflected Inertia at Input $kg \cdot m^2$
$\leq 0.50^\circ$	$\leq 0.13^\circ$	$\leq 0.066^\circ$		n1nom		
PF55-10	PF55-10A	PF55-10AR	10:1	89%	Right Hand	1.96×10^{-5}
PF55-12	PF55-12A	PF55-12AR	12:1	88%	Right Hand	1.84×10^{-5}
PF55-15	PF55-15A	PF55-15AR	15:1	86%	Right Hand	1.74×10^{-5}
PF55-20	PF55-20A	PF55-20AR	20:1	84%	Right Hand	1.67×10^{-5}
PF55-30	PF55-30A	PF55-30AR	30:1	78%	Right Hand	1.62×10^{-5}
PF55-60	PF55-60A	PF55-60AR	60:1	68%	Right Hand	1.58×10^{-5}
PF55-120	PF55-120A	PF55-120AR	120:1	47%	Right Hand	1.57×10^{-5}

Weight: 3.04 kg.

Nom. Input Speed [S1 T₂n] n1nom: 1,000 min⁻¹ (r/min)

Max. Input Speed n1max: 3,000 min⁻¹ (r/min)

Lubrication: Grease Shell Gadus S5 V4P 2.5

Lubrication Temperature: Max. Operating $\approx 60^\circ\text{C}$

Max. Output Radial Load F_{r2}: 600N.

Max. Output Axial Load F_{a2}: 400N.

Testing in your application is necessary.

You will need to assess duty cycles and confirm suitability with your own calculations.

Figures listed are for guidance only.

Cooling may be needed dependent on application.

Worm Gear Reducers

Flange Input • 10mm Input Bore • 15mm Output Bore
55mm Centre Distance • T_{2max} 38Nm – 60Nm • **10:1 - 120:1**

P Series Wormwheel Gearboxes

