ondrives

Precision Gears


Rack Pinion Actuator 30mm Stroke

15mm Input Shaft • 20mm Output Shaft • Capacity 60kgf

Actuator

When input shaft is rotated this is translated into linear movement of the rack up to its stroke range.

Ondrives are able to manufacture the RPA style with different strokes by $\ensuremath{\mathsf{RFO}}$

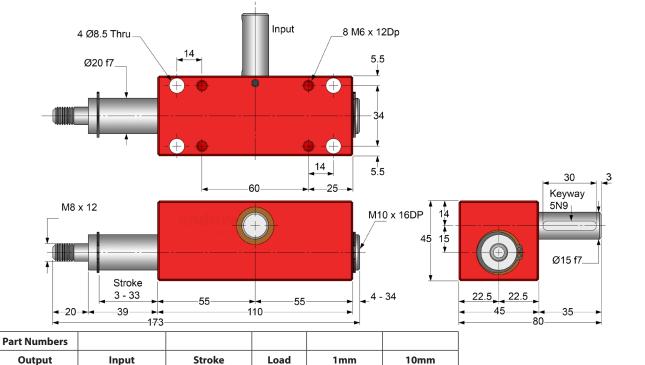

Travel

Input Rota-

tion

6.55

Stroke

Input Rota-

tion

196.5

Weight: ?? kg.

Backlash j

≤**2**°

RPA20-30

Lubrication: Grease Shell Gadus S5 V42P 2.5

Torque

Nm

5.20

Movement

mm

30

Capacity

Max.

kgf

60

Testing in your application is necessary. You will need to assess duty cycles and confirm suitability with your own calculations. Figures listed are for guidance only.

